
[illegible]

Mechanical Dimensions units in mm.

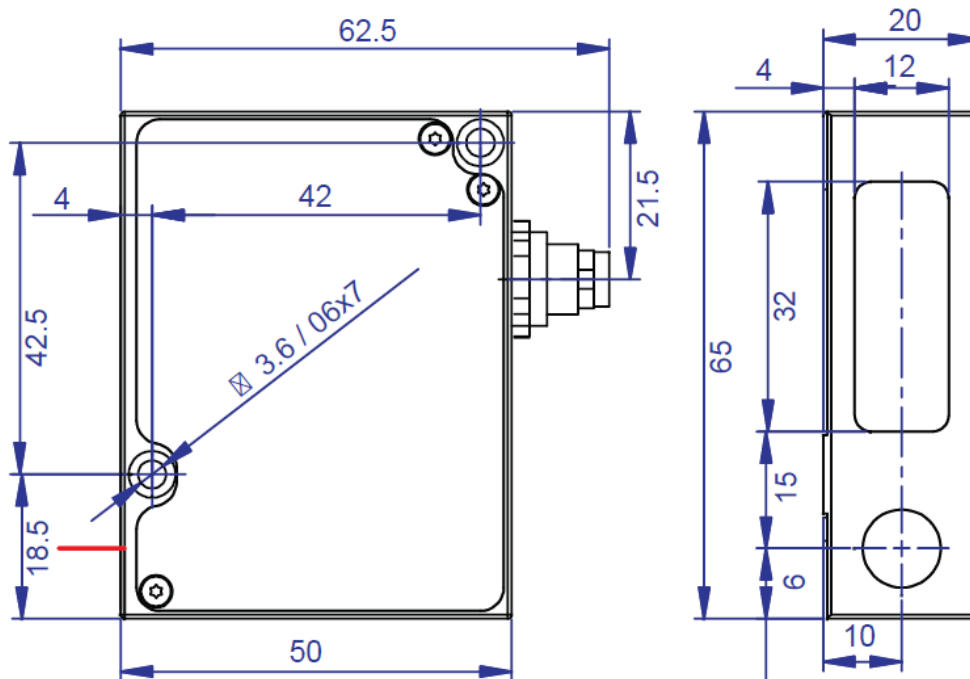

AR550 Sensor Options

Connectivity Kit: Includes terminal blocks, serial cable with molded DB9 connector, AC power supply with 110 VAC or 240 VAC

High Power Lasers: Diode upgrades to visible red or blue for high sample rates on dark surfaces or in high ambient light.

Cables: Optional, longer cables. Contact us for custom cabling needs.

Serial Interface: Optional RS485 interface for long-distance connections. Replaces RS232.

Analog Interface: Optional 0-10 V analog interface signal. Replaces 4-20mA signal

Internal Heater: Permits sensor use to -30°C

Air-Cooled Jacket: Optional enclosure with forced air to cool sensor for use up to 120°C. Sensor must be calibrated inside jacket at factory.

Spray Guard: Optional open-sided enclosure which helps to keep debris off optical windows.



© 2026

A product line of Schmitt Measurement Systems, Inc.

8000 NE 14th Place, Portland, Oregon, 97211, USA

Tel: (503) 227-7908 | Fax: (503) 223-1258 | acuitylaser.com

Specifications subject to change without notice